


1090 M & M WATER TIGHT COUPLER with FIPT 2"-3"



1090 Part No.	Nom. Pipe O.D. (Z)	Ring O.D. (Y)	Length (X)	Length (W)	FIPT Size	Carriage Bolt Size	No. of Bolts per Coupler	Weight		
1090-04I2	4.500"	7.250"	16.000"	8.000"	2"	3/8" x 2-1/2"	10	19 lbs.		
1090-05I2	5.563"	8.188"	18.000"	9.000"			12	22 lbs.		
1090-06I2	6.625"	9.125"					14	27 lbs.		
1090-06P2	6.140"	8.750"					12	27 lbs.		
1090-08I2	8.625"	11.375"					16	35 lbs.		
1090-08P2	8.160"	10.813"					16	35 lbs.		
1090-10I2	10.750"	13.688"					20	44 lbs.		
1090-10P2	10.200"	12.813"					20	49 lbs.		
1090-12I2	12.750"	15.875"					24	52 lbs.		
1090-12P2	12.240"	15.438"					24	52 lbs.		
1090-15P2	15.300"	18.250"					30	58 lbs.		
1090-183P2	18.360"	21.188"					20.000"	10.000"	36	77 lbs.
1090-187P2	18.700"	21.750"			36	82 lbs.				
1090-20P2	20.400"	23.500"	40	90 lbs.						
1090-04I2	4.500"	7.250"	16.000"	8.000"	3"	3/8" x 2-1/2"			10	21 lbs.
1090-05I2	5.563"	8.188"	18.000"	9.000"					12	24 lbs.
1090-06I2	6.625"	9.125"					14	29 lbs.		
1090-06P2	6.140"	8.750"					12	29 lbs.		
1090-08I2	8.625"	11.375"					16	37 lbs.		
1090-08P2	8.160"	10.813"					16	37 lbs.		
1090-10I2	10.750"	13.688"					20	46 lbs.		
1090-10P2	10.200"	12.813"					20	51 lbs.		
1090-12I2	12.750"	15.875"					24	54 lbs.		
1090-12P2	12.240"	15.438"					24	54 lbs.		
1090-15P2	15.300"	18.250"					30	60 lbs.		
1090-183P2	18.360"	21.188"					20.000"	10.000"	36	79 lbs.
1090-187P2	18.700"	21.750"			36	84 lbs.				
1090-20P2	20.400"	23.500"	40	92 lbs.						

- Use E/G/S after Part # to indicate Epoxy/ Galvanized/ 304 Stainless Steel.
- Bodies are 11 GA. Material.
- Rings are 5/16" Thick Carbon Steel and 1/4" Thick on Stainless Steel.
- FIPT's conform to ANSI/ASME B1.20.1 / 1/8" - 2" Straight Thread 2-1/2" - 6" Tapered Thread.
- Pressure Rating of 150 PSI.

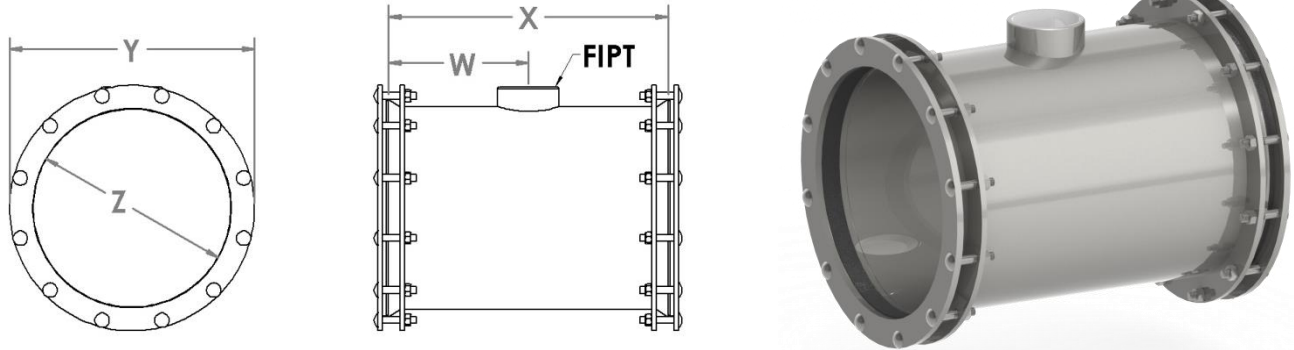



1090 M & M WATER TIGHT COUPLER with FIPT 4"-6"

1090 Part No.	Nom. Pipe O.D. (Z)	Ring O.D. (Y)	Length (X)	Length (W)	FIPT Size	Carriage Bolt Size	No. of Bolts per Coupler	Weight
1090-04I2	4.500"	7.250"	18.000"	9.000"	4"	3/8" x 2-1/2"	10	21 lbs.
1090-05I2	5.563"	8.188"					12	24 lbs.
1090-06I2	6.625"	9.125"					14	29 lbs.
1090-06P2	6.140"	8.750"					12	29 lbs.
1090-08I2	8.625"	11.375"					16	37 lbs.
1090-08P2	8.160"	10.813"					16	37 lbs.
1090-10I2	10.750"	13.688"					20	46 lbs.
1090-10P2	10.200"	12.813"					20	51 lbs.
1090-12I2	12.750"	15.875"					24	54 lbs.
1090-12P2	12.240"	15.438"					24	54 lbs.
1090-15P2	15.300"	18.250"					30	60 lbs.
1090-183P2	18.360"	21.188"					36	79 lbs.
1090-187P2	18.700"	21.750"					36	84 lbs.
1090-20P2	20.400"	23.500"					40	92 lbs.
1090-05I2	5.563"	8.188"	18.000"	9.000"	5"	3/8" x 2-1/2"	12	26 lbs.
1090-06I2	6.625"	9.125"					14	31 lbs.
1090-06P2	6.140"	8.750"					12	31 lbs.
1090-08I2	8.625"	11.375"					16	39 lbs.
1090-08P2	8.160"	10.813"					16	39 lbs.
1090-10I2	10.750"	13.688"					20	48 lbs.
1090-10P2	10.200"	12.813"					20	53 lbs.
1090-12I2	12.750"	15.875"					24	56 lbs.
1090-12P2	12.240"	15.438"					24	56 lbs.
1090-15P2	15.300"	18.250"					30	62 lbs.
1090-183P2	18.360"	21.188"					36	81 lbs.
1090-187P2	18.700"	21.750"					36	86 lbs.
1090-20P2	20.400"	23.500"					40	94 lbs.
1090-06I2	6.625"	9.125"					18.000"	9.000"
1090-06P2	6.140"	8.750"	12	33 lbs.				
1090-08I2	8.625"	11.375"	16	41 lbs.				
1090-08P2	8.160"	10.813"	16	41 lbs.				
1090-10I2	10.750"	13.688"	20	50 lbs.				
1090-10P2	10.200"	12.813"	20	55 lbs.				
1090-12I2	12.750"	15.875"	24	58 lbs.				
1090-12P2	12.240"	15.438"	24	58 lbs.				
1090-15P2	15.300"	18.250"	30	64 lbs.				
1090-183P2	18.360"	21.188"	36	83 lbs.				
1090-187P2	18.700"	21.750"	36	88 lbs.				
1090-20P2	20.400"	23.500"	40	96 lbs.				

- Use E/G/S after Part # to indicate Epoxy/ Galvanized/ 304 Stainless Steel.
- Bodies are 11 GA. Material.
- Rings are 5/16" Thick Carbon Steel and 1/4" Thick on Stainless Steel.
- FIPT's conform to ANSI/ASME B1.20.1 / 1/8" thru 2" Straight Thread 2-1/2" thru 6" Tapered Thread.
- Pressure Rating of 150 PSI.

