
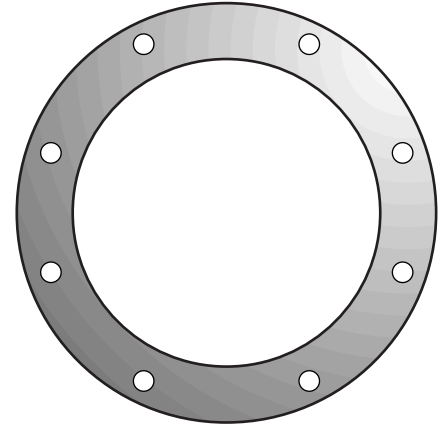


Morrell
INDUSTRIES, INC.
IRRIGATION EQUIPMENT MANUFACTURING

1020 LIGHT WEIGHT
FLAT FACE FLANGES
Carbon Steel 125 psi Rated

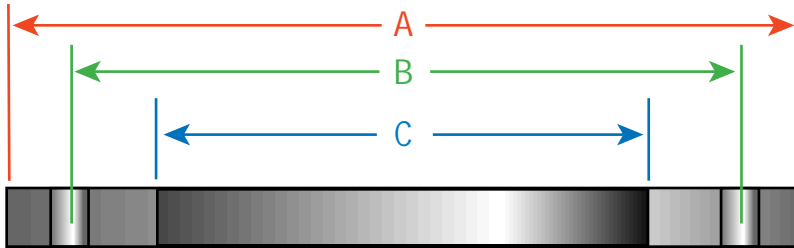

PART NUMBER	SIZE INCHES	O.D. FLANGE A = INCHES	BORE SIZE C = INCHES	NUMBER OF BOLTS	DIAMETER OF BOLT CIRCLE B = INCHES	DIAMETER OF BOLT HOLES = INCHES IRRIGATION	THICKNESS OF FLANGE IRRIGATION	APPROX. WEIGHT - LBS. IRRIGATION
1020-3I	3" IPS	7.5"	3.57	4	6.06"	3/4"	1/2"	6 lbs.
1020-4I	4" IPS	9"	4.57	8	7.50"	3/4"	1/2"	7 lbs.
1020-5I	5" IPS	10"	5.62	8	8.5625"	7/8"	1/2"	8 lbs.
1020-6I	6" IPS	11"	6.72	8	9.50"	7/8"	1/2"	10 lbs.
1020-8I	8" IPS	13.5"	8.57	8	11.75"	7/8"	1/2"	13 lbs.
1020-10I	10" IPS	16"	10.82	12	14.25"	1"	1/2"	17 lbs.
1020-12I	12" IPS	19"	12.82	12	17.00"	1"	1/2"	23 lbs.
1020-2D	2" O.D.	6"	2.06	4	4.75"	3/4"	1/2"	5 lbs.
1020-212D	2 1/2" O.D.	7"	2.06	4	5.50"	3/4"	1/2"	5.5 lbs.
1020-3D	3" O.D.	7.5"	3.06	4	6.06"	3/4"	1/2"	6 lbs.
1020-4D	4" O.D.	9"	4.06	8	7.50"	3/4"	1/2"	7 lbs.
1020-5D	5" O.D.	10"	5.06	8	8.50"	7/8"	1/2"	8 lbs.
1020-6D	6" O.D.	11"	6.06	8	9.50"	7/8"	1/2"	10 lbs.
1020-8D	8" O.D.	13.5"	8.06	8	11.75"	7/8"	1/2"	13 lbs.
1020-10D	10" O.D.	16"	10.06	12	14.25"	1"	1/2"	17 lbs.
1020-12D	12" O.D.	19"	12.06	12	17.00"	1"	1/2"	23 lbs.
1025-14D	14" O.D.	21"	14.12	12	18.75"	1 1/8"	5/8"	32 lbs.
1025-16D	16" O.D.	23.5"	16.12	16	21.75"	1 1/8"	5/8"	38 lbs.
1025-18D	18" O.D.	25"	18.12	16	22.75"	1 1/4"	5/8"	40 lbs.
1025-20D	20" O.D.	27.5"	20.12	20	25.00"	1 1/4"	5/8"	45 lbs.
1025-24D	24" O.D.	32"	44.12	20	29.50"	1 3/8"	3/4"	67 lbs.

These flanges shall be drilled to ANSI b 16.25 Specifications.
These flanges have the same diameter and drill as Class 1.25 cast-iron flanges.

Customer:
Project:
Engineer:
Architect:
PO#: