


1500 Ring Gaskets & 1502 Full Face Gaskets



Nom. Pipe O.D.	ANSI Size O.D.	F.F. Gaskets 125/150#				F.F. Gaskets 250/300#				Ring Gaskets	
		O.D.	# of Holes	B.H. Dia.	B.C. Dia.	O.D.	# of Holes	B.H. Dia.	B.C. Dia.	125/150 # O.D.	250/300 # O.D.
1/2"	0.88"	3.50"	4	0.63"	2.33"	3.75"	4	0.625"	2.63"	1.88"	2.13"
3/4"	1.06"	3.88"			2.75"	4.63"		0.750"	3.25"	2.25"	2.63"
1"	1.31"	4.25"			3.13"	4.88"		0.875"	3.50"	2.63"	2.88"
1-1/4"	1.68"	4.63"			3.50"	5.25"		1.000"	3.88"	3.00"	3.25"
1-1/2"	1.94"	5.00"	8	0.75"	3.88"	6.13"	8	4.50"	3.38"	3.75"	
2"	2.38"	6.00"			4.75"	6.50"		5.00"	4.13"	4.38"	
2-1/2"	2.88"	7.00"			5.50"	7.50"		5.88"	4.88"	5.13"	
3"	3.50"	7.50"			6.00"	8.25"		6.63"	5.38"	5.88"	
3-1/2"	4.00"	8.50"	8	0.88"	7.00"	9.00"	12	7.25"	6.38"	6.50"	
4"	4.50"	9.00"			7.50"	10.00"		7.88"	6.88"	7.13"	
5"	5.56"	10.00"			8.50"	11.00"		9.25"	7.75"	8.50"	
6"	6.63"	11.00"			9.50"	12.50"		10.63"	8.75"	9.88"	
8"	8.65"	13.50"	12	1.00"	11.75"	15.00"	16	1.000"	13.00"	11.00"	12.13"
10"	10.75"	16.00"			14.25"	17.50"		1.125"	15.25"	13.38"	14.25"
12"	12.75"	19.00"			17.00"	20.50"		1.250"	17.75"	16.13"	16.63"
14"	14.00"	21.00"			18.75"	23.00"		1.375"	20.25"	17.75"	19.13"
16"	16.00"	23.50"	16	1.13"	21.25"	25.50"	20	22.50"	20.50"	21.25"	
18"	18.00"	25.00"			22.75"	28.00"		1.625"	24.75"	21.63"	23.50"
20"	20.00"	27.50"			25.00"	30.50"		1.750"	27.00"	23.88"	25.75"
22"	22.00"	29.50"			27.25"	33.00"		1.875"	29.25"	26.00"	27.63"
24"	24.00"	32.00"	20	1.25"	29.50"	36.00"	24	32.00"	28.25"	30.50"	
26"	26.00"	34.75"			31.75"	38.25"		1.750"	34.50"	30.50"	32.88"
28"	28.00"	36.50"			34.00"	40.75"		1.875"	37.00"	32.75"	35.33"
30"	30.00"	38.75"			36.00"	43.00"		2.000"	39.50"	34.75"	37.50"
32"	32.00"	41.75"	24	1.38"	38.50"	45.25"	28	41.50"	38.00"	39.63"	
34"	34.00"	43.75"			40.50"	47.50"		2.125"	43.50"	39.00"	41.63"
36"	36.00"	46.00"			42.75"	50.00"		32	46.00"	41.25"	44.00"
38"	38.00"	48.75"			45.25"	52.25"			2.250"	48.00"	43.63"
40"	40.00"	50.75"	32	1.63"	47.25"	54.25"	36		50.25"	45.63"	48.75"
42"	42.00"	53.00"			49.50"	57.00"			52.75"	48.00"	50.75"
44"	44.00"	55.25"			51.75"	59.25"		40	55.00"	50.13"	53.00"
46"	46.00"	57.25"			53.75"	61.50"			57.75"	52.13"	55.25"
48"	48.00"	59.50"	44	56.00"	65.00"	40	60.75"	54.50"	58.50"		

- Dimensions per ANSI B16.5 and AWWA C110 standards for pipe flanges and gaskets.
- Dimensional Tolerances (unless otherwise stated): Up to 1" @ +/- 0.0325"; 1.25" thru 12" @ +/- 0.0625"; 14" thru 24" @ +/- 0.0975"; 26" and above @ +/- 0.25".
- Standard thicknesses are 1/16" and 1/8", other thicknesses are available.
- Standard 1500/1502 are Non-Asbestos (NA), Neoprene, EPDM, Buna N, Silicone, Viton, Teflon and other materials readily available.

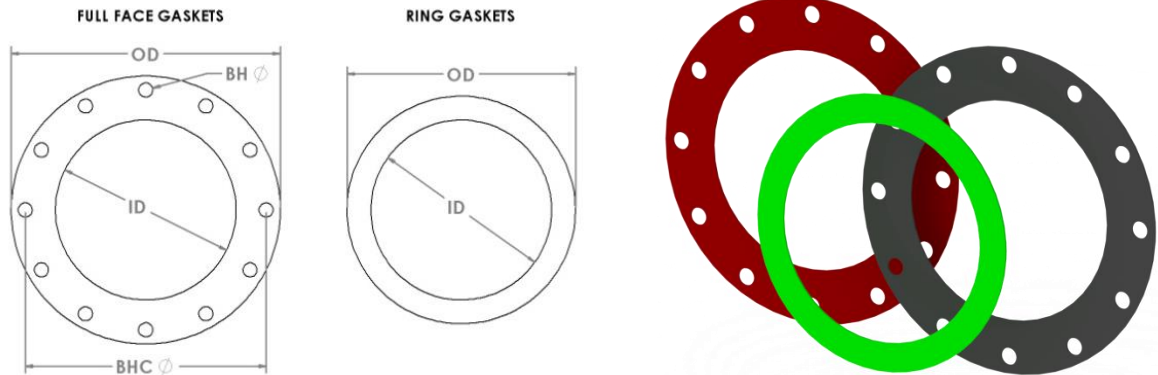